


# C25-6-013

Tweeter

DOMEMATERIAL: CERAMIC  
APPLICATION: TWEETER  
NOMINAL DIAMETER: 25 mm  
SENSITIVITY: 92 dB

## MAIN FEATURES :

- SPECIAL DOME CUTOUTS
- UNDERHUNG MOTOR DESIGN
- SOFT FABRIC SURROUND
- VENTED VC & POLE PIECE
- 2500 HZ - 32 KHZ

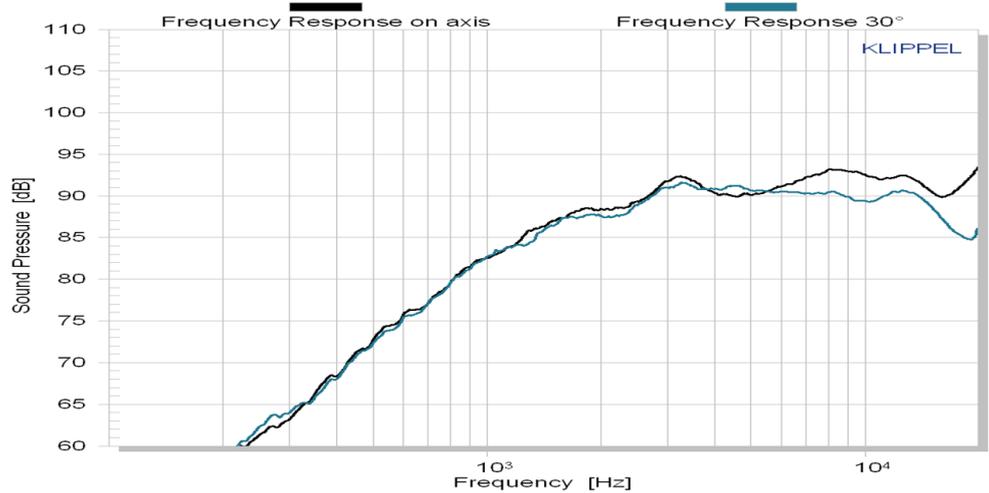



The **C25 - 6 - 013** is a 1 inch tweeter with ultra hard **ceramic dome** in a 82 mm frontplate.


Anti-resonant **cutout fills** in the ceramic dome provide for damping of the dome resonance.

An underhung motor design with vented aluminium voice coil former and neodymium magnet guarantees low energy storage and excellent heat transfer.

The **soft fabric surround** and ferrofluid with high viscosity center the moving parts with distinctive linearity.

We recommend an application above 2500 Hz.

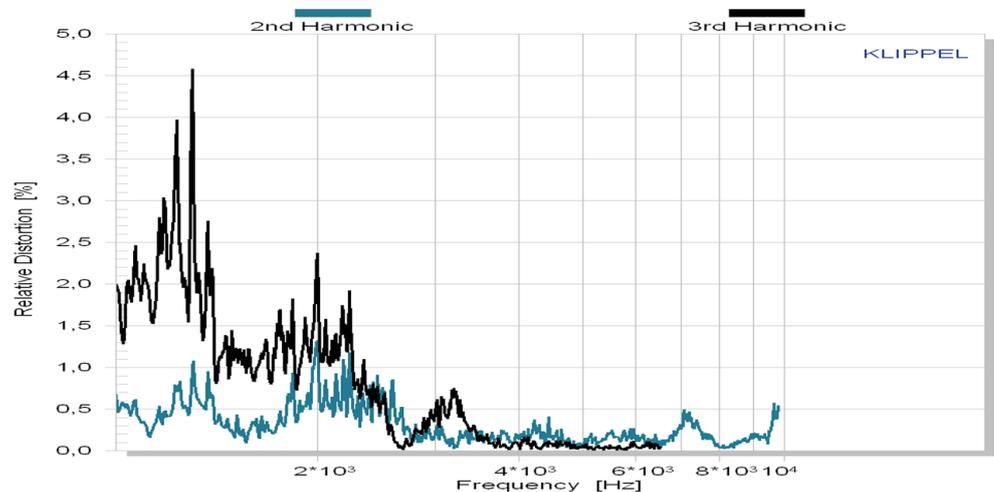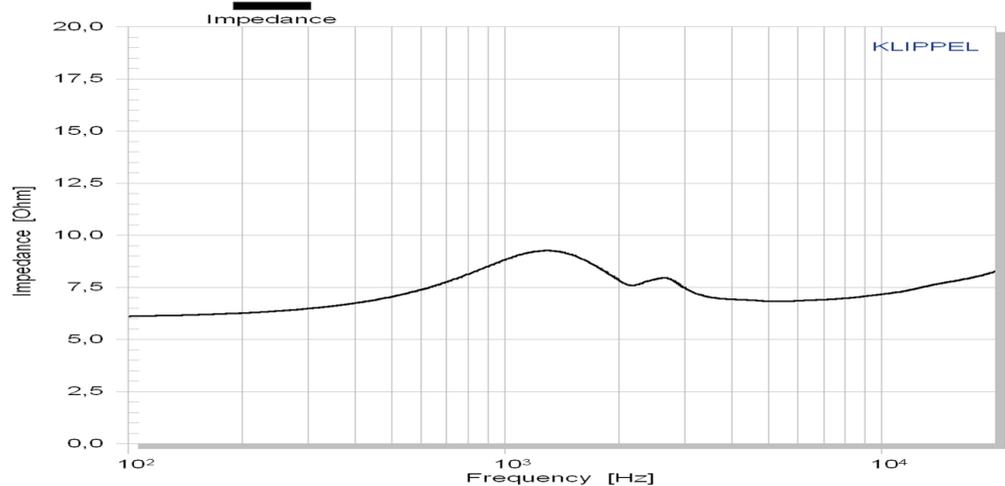

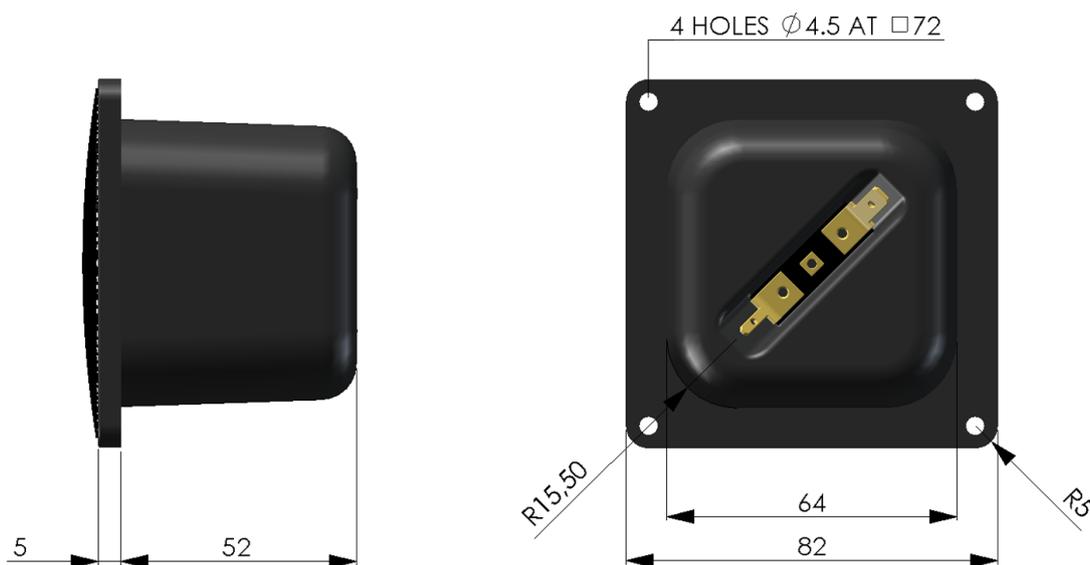

Mechanical data		
Overall square	82	mm
Cutout hole square	64	mm
Frontplate depth	5	mm
Overall depth	57	mm
Motor assembly diameter	-	
Motor assembly depth	-	
Screw fitting	DIN 7984, 4mm	
Terminal	+ : 4.8 x 0.8 / - : 2.8 x 0.8	mm
Shipping weight / net weight (one piece)	0.48 / 0.38	mm
Shipping box size (pair)	130 / 130 / 190	mm

Thiele/Small Parameters			
Sensitivity (2.83V / 1m)	Lp	92*	dB
DC-resistance	Re	6.1	Ohm
resonance frequency	Fs	1450	Hz
equivalent volume of air	Vas	-	L
mechanical Q	Qms	0.80	
electrical Q	Qes	1.63	
total Q	Qts	0.54	
effective piston area	Sd	5.94	cm <sup>2</sup>
moving mass	Mms	0.18	g
suspension compl.	Cms	0.066	mm/N
mechanical resistance	Rms	2.03	kg x s

Voice Coil data			
Power handling	P	120*	Watt
Linear excursion	Xmax	+/- 0.15	mm
Voice coil diameter		16.4	mm
Voice coil former material		Al	
Voice coil wire material		Cu	
Voice coil inductance	Le	0.02	mH
Force factor	Bl	2.47	N/A
Motor type		Underhung	
Ferrofluid filling		yes	

\* Please refer to [www.accuton.com](http://www.accuton.com) for exact measurement conditions and further information.