


- Low-Profile
- Compact Motor and Suspension Layout
- Neodymium Motor
- Paper Diaphragm
- Rubber Surround

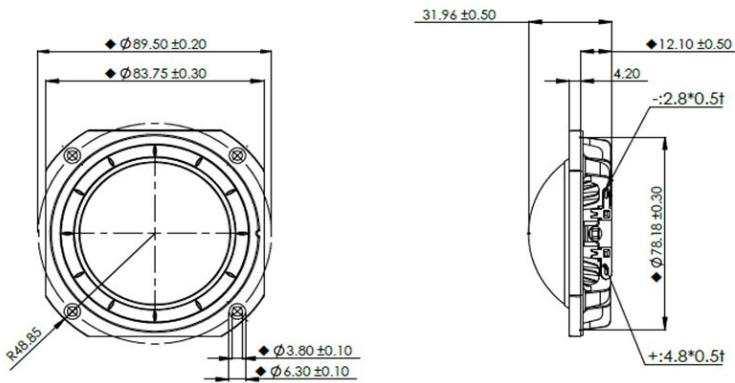


SPECIFICATIONS

| | | |
|--|---------------------|------------|
| Transducer Size | 3.5 | in |
| Impedance | 4 | Ω |
| Frequency Range ¹ | 100 - 8000 | Hz |
| Sensitivity ² (2.83V 1W @ 1m) | 86.3 83.3 | dB |
| Power Rating (IEC 268-5) | 15 | W |
| Voice Coil Size | 25.7 | mm |
| Air Gap Winding Height | H_{ag} H_{vc} | 3 7.1 mm |
| Net Weight | 0.121 | kg |

PARAMETERS ³

| | | | |
|---------------------------------------|------------|-------|-------------------------------|
| Eff. Piston Area | S_d | 35.3 | cm ² |
| DC Resistance | R_e | 3.2 | Ω |
| Minimum Impedance | Z_{min} | 3.3 | Ω |
| Inductance | L_e | 0.101 | mH |
| Resonance Frequency ⁴ | F_s | 120 | Hz |
| Mechanical Q Factor | Q_{ms} | 5.24 | - |
| Electrical Q Factor | Q_{es} | 1.1 | - |
| Total Q Factor | Q_{ts} | 0.91 | - |
| Moving Mass | M_{ms} | 3.77 | g |
| Compliance | C_{ms} | 450 | $\mu\text{m/N}$ |
| Equivalent Volume | V_{as} | 0.789 | L |
| Motor Force Factor | Bl | 2.9 | Tm |
| Motor Efficiency | β | 2.64 | (Bl) ² / R_e |
| Linear Excursion ⁵ | X_{max} | 3.05 | mm |
| Max Mechanical Excursion ⁶ | X_{mech} | - | mm |

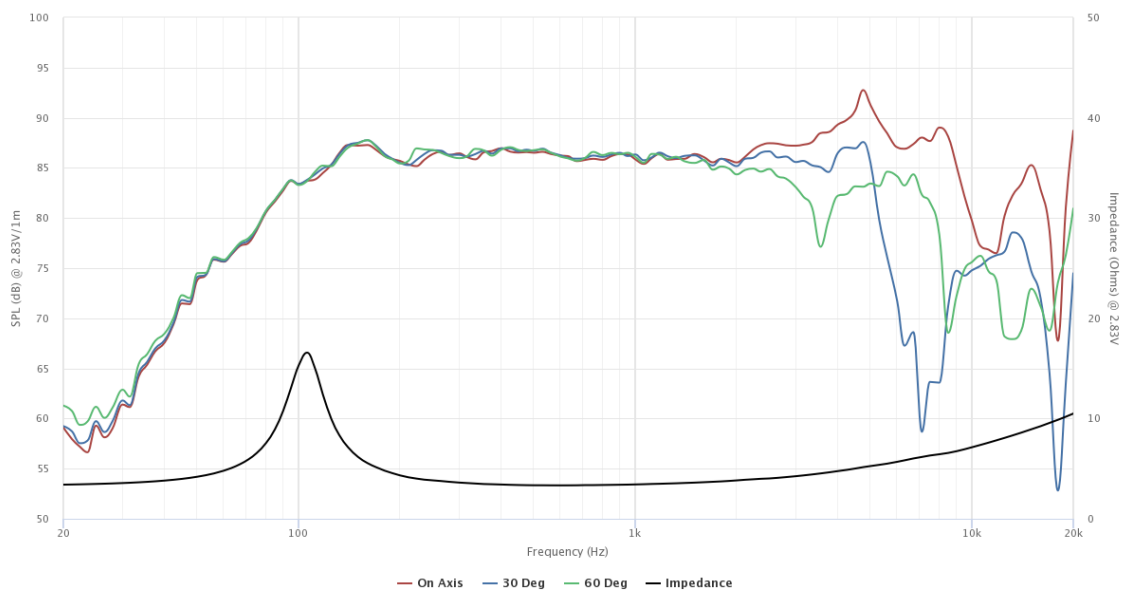

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tympany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. ¹ Specified by Engineering as linear working range of transducer. ² Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. ³ Measured in Free Air without preconditioning, therefore subject to some deviation. ⁴ Impedance and F_s value measured under different conditions. ⁵ Equal/Overhung: $(H_{vc} - H_{ag})/2 + H_{ag}/3$. Underhung: $(H_{ag} - H_{vc})/2 + H_{vc}/3$. ⁶ Mechanically limited excursion (e.g. bottoming, spider crash).