

## Are you ready for SubDuction?

The SDX12 subwoofer is ideal for both home theater & car audio environments and produces prodigious amounts of output with excellent sound quality. Designed to work great in sealed or vented/PR enclosures of reasonable box size, the SDX12 is a price/performance leader among high performance subwoofers. See the application notes for recommended enclosure designs.

- dotted non-pressed paper cone with NBR surround
- high power, low inductance design, 2 layer 3" (76mm) copper voice coil and 2 aluminium and 1 copper shorting rings inside the magnet
- forged and machined T-yoke and top plate with larger radiused pole vent for low aerodynamic noise
- high excursion spider with integrated lead wire
- attractive cast aluminum basket design with cast aluminum trim ring
- sealing gasket and mounting hardware included

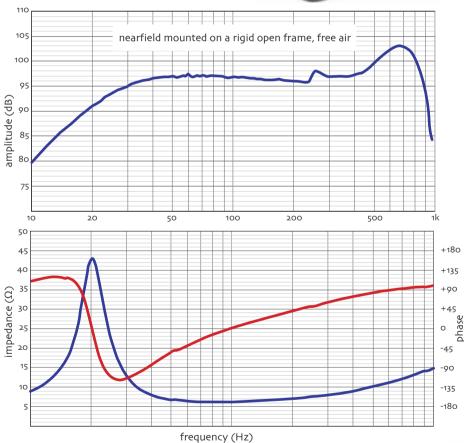

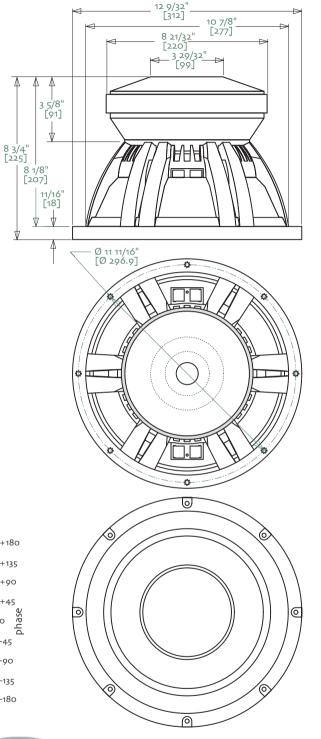

CSS SDX12 SubDuction Thiele/Small Parameters			
F <sub>s</sub> (Hz)	21.3	X <sub>max</sub> (one way)	28mm
Q <sub>es</sub>	0.414	S <sub>d</sub> (cm <sup>2</sup> )	491
Qms	3.962	Le	1.38
Qts	0.374	BL NA	18.4
Vas (litres)	67.5	M <sub>ms (g)</sub>	275.9
R <sub>e</sub> (Ω)	3.7	SPL (dB@1W 1m)	84.0
dual 2 ohm voice coils in series			





www.creativesound.ca