Peerless

Paper Diaphragm


• Cast Aluminum Frame


• Neodymium Motor

• Copper Cap


NE265W-08







SPECIFICATIONS			
Transducer Size		10	in
Impedance		8	Ω
Frequency Range ¹		30 - 2000	Hz
Sensitivity ² (2.83V 1W @ 1m)		84.2 84.2	dB
Power Rating (IEC 268-5)		190	w
Voice Coil Size		51.3	mm
Air Gap Winding Height	H _{ag} H _{vc}	8 26.7	mm
Net Weight		2.27	kg
PARAMETERS ³			
Eff. Piston Area	s _d	327	cm ²
DC Resistance	R _e	6.4	Ω
Minimum Impedance	Z _{min}	7.7	Ω
Inductance	Le	1.41	mH
Resonance Frequency ⁴	Fs	24	Hz
Mechanical Q Factor	Q _{ms}	11.4	-
Electrical Q Factor	Q _{es}	0.352	-
Total Q Factor	Q _{ts}	0.34	-
Moving Mass	M _{ms}	87.2	g
Compliance	C _{ms}	500	μm/N
Equivalent Volume	V _{as}	75.2	L
Motor Force Factor	BI	15.5	Tm
Motor Efficiency	β	37.6	(BI) ² / R _e
Linear Excursion ⁵	X max	12	mm
Max Mechanical Excursion ⁶	X mech	-	mm

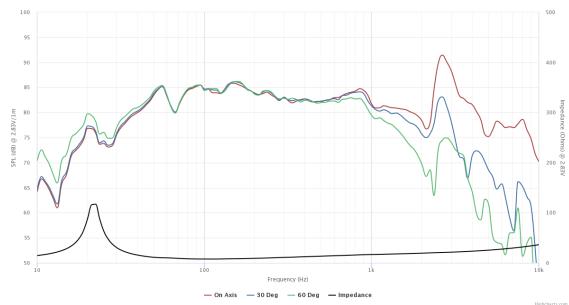

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tymphany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. ¹ Specified by Engineering as linear working range of transducer. ² Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. ³ Measured in Free Air without preconditioning, therefore subject to some deviation. ⁴ Impedance and Fs value measured under different conditions. ⁵ Equal/Overhung: $(H_{vc} - H_{ag})/2 + H_{ag}/3$. Underhung: $(H_{ag} - H_{vc})/2 + H_{vc}/3$. ⁶ Mechanically limited excursion (e.g. bottoming, spider crash).